


EXHAUST SILENCERS




Type REF25

Damping level 20 dB(A) without integrated Spark Arrestor

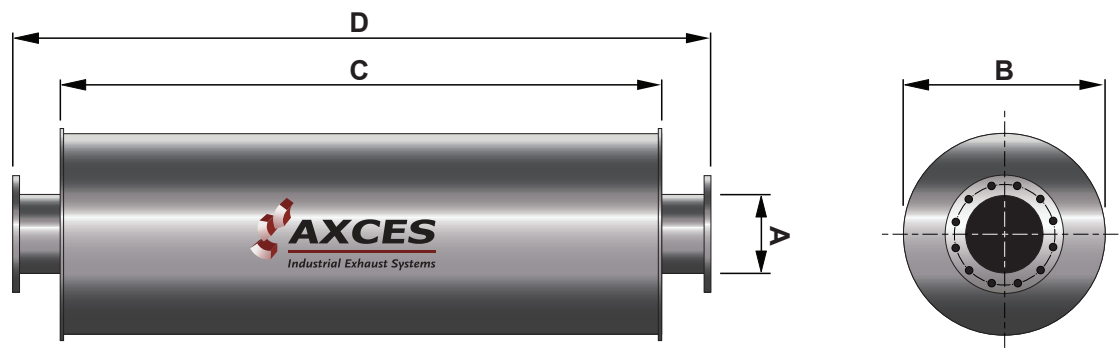

Article. No	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (mass)
150100000015	1.5"	40	48.3	200	750	900	15 kg
150100000020	2"	50	60.3	200	750	900	16 kg
150100000025	2.5"	60	76.1	260	850	1000	22 kg
150100000030	3"	80	88.9	310	850	1000	30 kg
150100000040	4"	100	114.3	360	1270	1500	50 kg
150100000050	5"	125	139.7	400	1270	1500	65 kg
150100000060	6"	150	168.3	475	1500	1750	120 kg
150100000080	8"	200	219.1	560	1750	2000	165 kg
150100000100	10"	250	273.0	635	2250	2500	230 kg
150100000120	12"	300	323.9	760	2500	2750	330 kg
150100000140	14"	350	355.6	860	2750	3000	380 kg
150100000160	16"	400	406.4	910	3000	3250	410 kg
150100000180	18"	450	457.2	960	3250	3500	480 kg
150100000200	20"	500	508.0	1060	3500	3750	705 kg

Back Pressure Type REF25

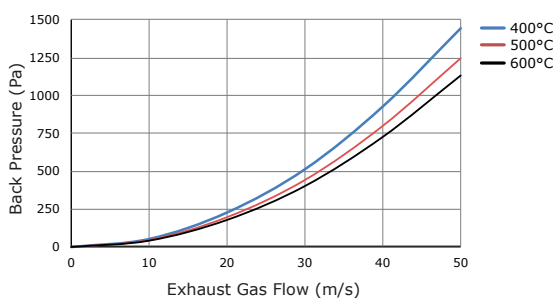

Damping Of The Noise Level +/- 20 dB(A)

Damping Basics of the silencers type REF25 are according the reflection principal

Spark Arrestor The silencers type REF25 are excluding an integrated Spark Arrestor

Mounting The silencers type REF25 can be installed both horizontal and vertical

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s

Material Silencers type REF25 are produced out of Steel 37-2 (S235JRG2)

Temperature Maximum allowable temperature is 600 °C

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements

Noise Reduction Type REF25

